



SPEED QUEEN® MULTI-HOUSING LAUNDRY SOLUTIONS

Stack Washer/Dryer – Short

Quantum® Gold Pro

Prep for Card | Coin Drop Installed

Built for Reliable Performance

Speed Queen's stack washer/dryer brings an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on all floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Speed Queen's stack washer/dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Front load products have met every design standard to be 100% ADA compliant.




- Integrated meter case
- Large capacity meter case standard
- Wash Alert™ capability

Washer (ADA Compliant)

- Rugged suspension system
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Durable stainless steel washtub
- Four-compartment soap dispenser
- Extra-wide 15.5" door opening and 180° door swing
- Stainless-steel braided fill hoses are 48" long with Garden Hose Thread (GHT). Screens included.

Dryer

- Upfront lint filter easy to clean
- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system

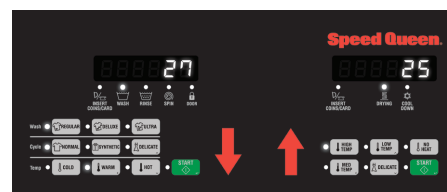


Quantum® Gold Pro Control

The Quantum® Gold Pro control delivers a truly premium experience to residents. From intuitive soft touch buttons that walk them through cycle options to multiple actuations (coin, card, mobile) for payment flexibility, this control gives residents the wash and dry options they want, and the revenue potential managers desire.

Stack Washer/Dryer – Short

Quantum® Gold Pro

Specifications		Washer	Dryer
Control Option	Quantum Gold Pro		
Color	White		
Capacity - lb (kg)		21.5 (9.5)	18 (8.2)
Overall Width - in (mm)	26.875 (683)		
Overall Depth - in (mm)	27.73 (704)		
Overall Height - in (mm)	76.5 (1943)		
Cylinder Volume cu. ft. (liters)		3.42 (96.8)	7.0 (198)
Motor Size - HP (kW)	0.9 (0.67)		
Type Of Gas (Gas Models Only)		-	Natural Gas
Water Consumption Per Cycle - g (liter)**		13.68 (51.78)	-
IWF (Water Factor) - gal/ft ³ (liters/liter/cycle)**		4.0 (0.53)	-
MEF ₁₂ (Modified Energy Factor) ft ³ /kWh/cycle (Liters/kWh/cycle)**		2.20 (62.3)	-
Available Water Temperatures		Hot, Warm, Cold	-
Available Cycles		Normal, Synthetic, Delicate	High, Medium, Low, Delicate, No Heat
Air Outlet Diameter - in (mm)		-	4 (102)
Exhaust Airflow - cfm (liters/sec)		-	220 (105)
Electrical Requirements	Electric	120/60/1-15 amp	208-240/60/1-30 amp
	Gas	120/60/1-15 amp	120/60/1-15 amp
Heating Element	Electric	-	5350W, 240V 4750W, 208V
	Gas	-	25,000 Btu
Net Weight - lb (kg)	385 (175)		
Shipping Weight - lb (kg)	417 (189)		
Shipping Dimensions Approx. - in (mm)	Width	34 (864)	
	Depth	30 (762)	
	Height	80 (2032)	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	

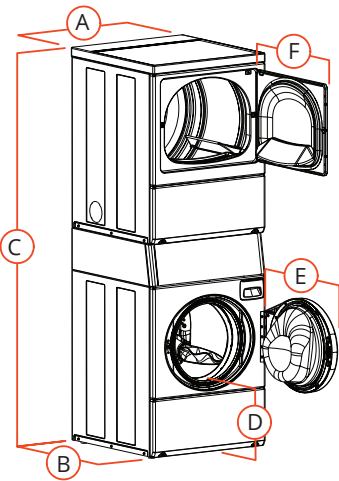

A.	Overall Width - in (mm)	26.875 (683)
B.	Overall Depth - in (mm)	27.73 (704)
C.	Overall Height - in (mm)	76.5 (1943)
D.	Floor To Door Opening -in (mm)	14.5 (368)*
E.	Door Swing - in (mm)	23.5 (597)

* For ADA compliance turn legs out from base 0.5 inches

Models	Drain		Actuation
STENCFSP178TW01	Electric	Pump	Coin Drop Installed 
STGNCFSP118TW01	Gas	Pump	
STENYFSP178TW01	Electric	Pump	Prep for Card 
STGNYFSP118TW01	Gas	Pump	

Electric dryers come equipped for 208-240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.
Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

Commercial product is not authorized for sale to Residential end consumers.