

MULTI-LOAD WASHERS U.S./CANADA

MWR55PD/PR ■ RIGID MOUNT ■ VENDED
(COIN DROP EQUIPPED & CARD READER READY)



COIN DROP EQUIPPED
MWR55PDATS pictured



CARD READER READY
MWR55PRATS pictured

The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



7-IN. TOUCHSCREEN CONTROLS

This large, responsive display allows users to easily navigate settings, choose cycles, and view real-time updates.



SOAP BOX SPRAY RINSE

The soap box spray rinse helps prevent residue buildup, keeps components cleaner with less effort, and promotes consistent long-term machine performance.



200G EXTRACTION

Shortens drying times and removes excess moisture with powerful 200G-force extraction.



CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

STANDARD FEATURES

- Large door opens to 180°
- Stainless steel top, drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 4-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

®/™ © 2026 Maytag. All rights reserved.


MY250488 02/26

MULTI-LOAD WASHERS U.S./CANADA


MWR55PD/PR ■ RIGID MOUNT ■ VENDED
(COIN DROP EQUIPPED & CARD READER READY)




FRONT VIEW (Appearance may vary.)

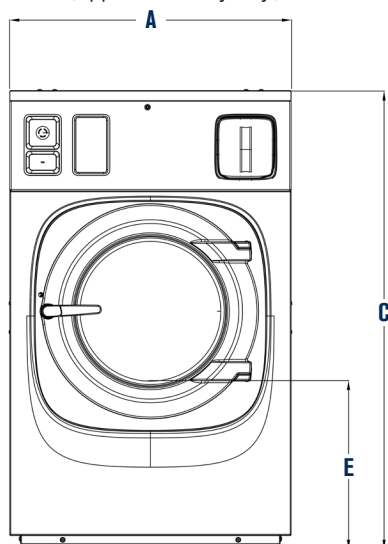

SIDE VIEW

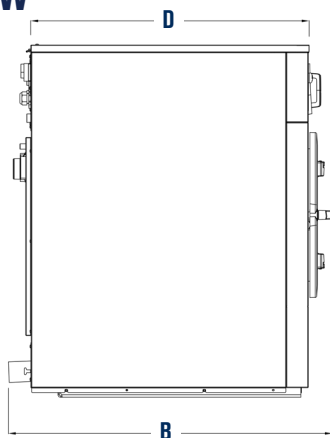

BACK VIEW

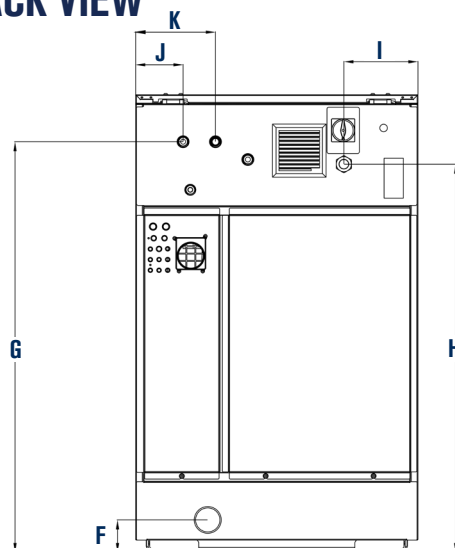

SPECIFICATIONS

MODEL	MWR55PD/PR
Rated Capacity — lb (kg)	55 (25)
Extraction (G-Force)	200
Drum Diameter — in (mm)	27.6 (701)
Drum Depth — in (mm)	25 (630)
Drum Volume — cu ft (L)	8.5 (241)
Electrical Requirements — Volts/Hz/Phase	208-240/50-60/1
Circuit Breaker	20 A
Motor HP (kW)	3.0 (2.2)
DIMENSIONS	
Crated Width — in (mm)	35.8 (910)
Crated Height — in (mm)	60.7 (1,541)
Crated Depth — in (mm)	51.6 (1,310)
Drawing Dimensions	
Uncrated Width — in (mm)	A. 34.2 (869)
Drain to Door Handle — in (mm)	B. 50.2 (1,275)
Uncrated Height — in (mm)	C. 54.7 (1,390)
Uncrated Depth — in (mm)	D. 43 (1,093)
Door Opening to Floor — in (mm)	E. 21.2 (538)
Center of Drain to Floor — in (mm)	F. 3.6 (91)
Center of Water Connections to Floor — in (mm)	G. 49.6 (1,260)
Electrical Connection to Floor — in (mm)	H. 46.9 (1,190)
Electrical Connection to Right Side — in (mm)	I. 8.6 (218)
Cold Water Connection to Left Side — in (mm)	J. 2.8 (72)
Hot Water Connection to Left Side — in (mm)	K. 8.3 (212)
APPROXIMATE WEIGHT	
Uncrated — lb (kg)	970 (440)
Crated Weight — lb (kg)	1,003 (455)
SPEED	
Wash RPM (G)	37 (0.53)
Spin RPM (G)	710 (200)
WATER SPECIFICATIONS	
Operating Pressure	15-87 PSI
Inlets Size — in (mm)/Connections	3/4 (19)/2
Approximate Water Consumption TOTAL — Gal (L)/cycle	43.3 (163.9)
Drain Valve (Outer Diameter) — in (mm)	3 (76.2)

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

