

MULTI-LOAD WASHERS U.S./CANADA

MWR85PD/PR ■ RIGID MOUNT ■ VENDED
(COIN DROP EQUIPPED & CARD READER READY)



COIN DROP EQUIPPED
MWR85PDATS pictured



CARD READER READY
MWR85PRATS pictured

The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



7-IN. TOUCHSCREEN CONTROLS

This large, responsive display allows users to easily navigate settings, choose cycles, and view real-time updates.



SOAP BOX SPRAY RINSE

The soap box spray rinse helps prevent residue buildup, keeps components cleaner with less effort, and promotes consistent long-term machine performance.



150G EXTRACTION

Shortens drying times and removes excess moisture with powerful 150G-force extraction.



CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

STANDARD FEATURES

- Large door opens to 180°
- Stainless steel top, drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 4-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See maytagcommerciallaundry.com for warranty details.


VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.

MULTI-LOAD WASHERS U.S./CANADA


MWR85PD/PR ■ RIGID MOUNT ■ VENDED
(COIN DROP EQUIPPED & CARD READER READY)




FRONT VIEW (Appearance may vary.)

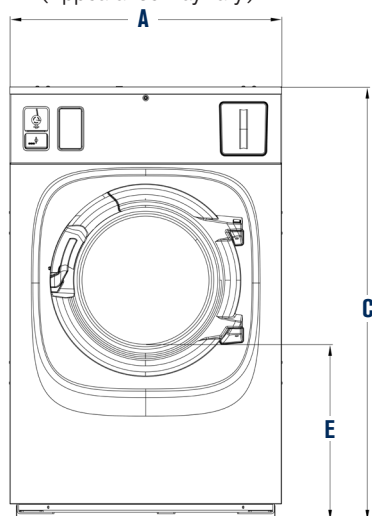

SIDE VIEW

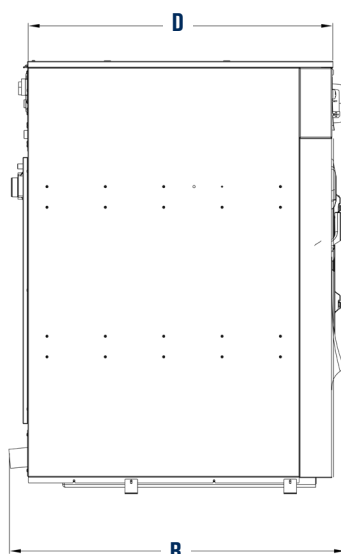

BACK VIEW

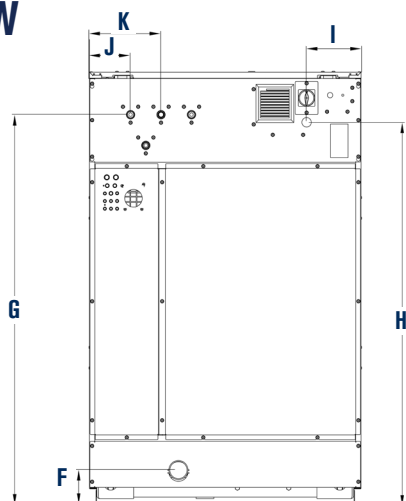

SPECIFICATIONS

MODEL	MWR85PD/PR
Rated Capacity — lb (kg)	85 (38.6)
Extraction (G-Force)	150
Drum Diameter — in (mm)	35.4 (899)
Drum Depth — in (mm)	23 (574)
Drum Volume — cu ft (L)	12.9 (365)
Electrical Requirements — Volts/Hz/Phase	208-240/50-60/1
Circuit Breaker	15 A
Motor HP (kW)	4.0 (3.0)
DIMENSIONS	
Crated Width — in (mm)	43.7 (1,110)
Crated Height — in (mm)	71.1 (1,806)
Crated Depth — in (mm)	52.4 (1,330)
Drawing Dimensions	
Uncrated Width — in (mm)	A. 42.1 (1,070)
Drain to Front Panel — in (mm)	B. 51.2 (1,300)
Uncrated Height — in (mm)	C. 65.6 (1,665)
Uncrated Depth — in (mm)	D. 47.2 (1,199)
Door Opening to Floor — in (mm)	E. 26 (661)
Center of Drain to Floor — in (mm)	F. 4.4 (111)
Center of Water Connections to Floor — in (mm)	G. 59 (1,499)
Electrical Connection to Floor — in (mm)	H. 57.8 (1,469)
Electrical Connection to Right Side — in (mm)	I. 8.5 (215)
Cold Water Connection to Left Side — in (mm)	J. 6.4 (162)
Hot Water Connection to Left Side — in (mm)	K. 11.1 (282)
APPROXIMATE WEIGHT	
Uncrated — lb (kg)	1,742 (790)
Crated — lb (kg)	1,786 (810)
SPEED	
Wash RPM (G)	35 (0.62)
Spin RPM (G)	545 (150)
WATER SPECIFICATIONS	
Operating Pressure	15-87 PSI
Inlets Size — in (mm)/Connections	3/4 (19)/2
Approximate Water Consumption TOTAL — Gal (L)/cycle	67.9 (257)
Drain Valve (Outer Diameter) — in (mm)	3 (76.2)

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

