

# MULTI-LOAD WASHERS U.S./CANADA

## MWS45PNATS ■ SOFT MOUNT ■ NON VEND (OPL CONTROL)



The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



### 7-IN. LCD SCREEN

This large display allows users to easily view settings, cycles, and real-time updates.



### 360G EXTRACTION

Shortens drying times and removes excess moisture with powerful 360G-force extraction.



### CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



### REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

## STANDARD FEATURES

- Large door opens to 180°
- Stainless steel drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 5-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.


®/™ © 2026 Maytag. All rights reserved.  
MY250496 02/26

# MULTI-LOAD WASHERS U.S./CANADA


## MWS45PNATS ■ SOFT MOUNT ■ NON VEND (OPL CONTROL)




### FRONT VIEW (Appearance may vary.)

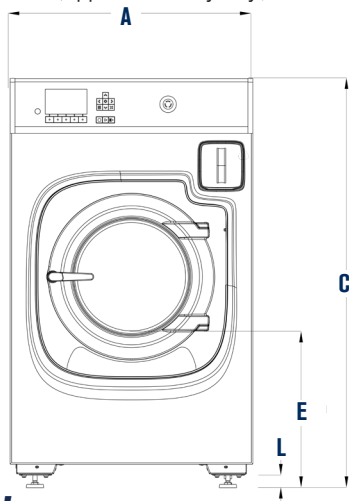

### SIDE VIEW

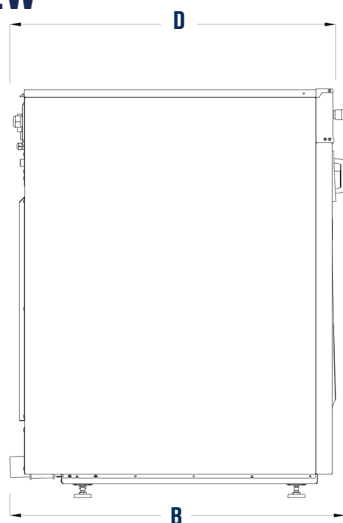

### BACK VIEW

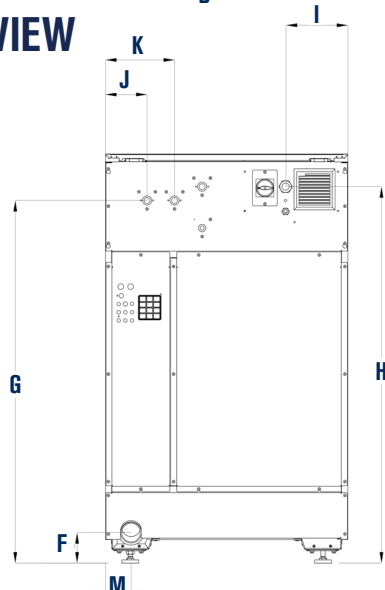

### SPECIFICATIONS

| MODEL                                                  | MWS45PNATS      |
|--------------------------------------------------------|-----------------|
| Rated Capacity — lb (kg)                               | 45 (20.4)       |
| Extraction (G-Force)                                   | 360             |
| Drum Diameter — in (mm)                                | 24.8 (630)      |
| Drum Depth — in (mm)                                   | 23 (579)        |
| Drum Volume — cu ft (L)                                | 6.4 (181)       |
| Electrical Requirements — Volts/Hz/Phase               | 208-240/50-60/1 |
| Circuit Breaker                                        | 25 A            |
| Motor HP (kW)                                          | 4.0 (3.0)       |
| DIMENSIONS                                             |                 |
| Crated Width — in (mm)                                 | 36.6 (930)      |
| Crated Height — in (mm)                                | 61.8 (1,570)    |
| Crated Depth — in (mm)                                 | 51.2 (1,300)    |
| Drawing Dimensions                                     |                 |
| Uncrated Width — in (mm)                               | A. 34.6 (879)   |
| Drain to Door Handle — in (mm)                         | B. 47.8 (1,214) |
| Uncrated Height — in (mm)                              | C. 59.1 (1,501) |
| Uncrated Depth — in (mm)                               | D. 48.3 (1,227) |
| Door Opening to Floor — in (mm)                        | E. 22.3 (566)   |
| Center of Drain to Floor — in (mm)                     | F. 4.4 (111)    |
| Center of Water Connections to Floor — in (mm)         | G. 51.8 (1,315) |
| Electrical Connection to Floor — in (mm)               | H. 53.8 (1,366) |
| Electrical Connection to Right Side — in (mm)          | I. 8.9 (225)    |
| Cold Water Connection to Left Side — in (mm)           | J. 5.9 (150)    |
| Hot Water Connection to Left Side — in (mm)            | K. 9.8 (250)    |
| Leg Height — in (mm)                                   | L. 1.8 (45)     |
| Center of Drain to Side — in (mm)                      | M. 3.7 (93)     |
| APPROXIMATE WEIGHT                                     |                 |
| Uncrated — lb (kg)                                     | 1,047 (474.9)   |
| Crated — lb (kg)                                       | 1,090 (494.4)   |
| SPEED                                                  |                 |
| Wash RPM (G)                                           | 43 (0.65)       |
| Spin RPM (G)                                           | 1,012 (360)     |
| WATER SPECIFICATIONS                                   |                 |
| Operating Pressure                                     | 15-87 PSI       |
| Inlets Size — in (mm)/Connections                      | 3/4 (19)/2      |
| Approximate Water Consumption<br>TOTAL — Gal (L)/cycle | 37.2 (141)      |
| Drain Valve (Outer Diameter) — in (mm)                 | 3 (76.2)        |

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

