

MULTI-LOAD WASHERS U.S./CANADA

MWS85PNAVS ▪ SOFT MOUNT ▪ NON VEND (OPL CONTROL)



The expanded line of Maytag Commercial Washers up to a capacity of 85 pounds provides operators what they've asked for: reliable, durable equipment built to satisfy market demands.



7-IN. LCD SCREEN

This large display allows users to easily view settings, cycles, and real-time updates.



360G EXTRACTION

Shortens drying times and removes excess moisture with powerful 360G-force extraction.



CERAMIC-COATED SHAFT SLEEVE

Specially designed to help reduce friction within the drive train to support long-term durability.



REMOVABLE DISPENSER TRAYS

Simplified maintenance. Each tray can be removed without detaching the assembly.

STANDARD FEATURES

- Large door opens to 180°
- Stainless steel drum, tub, and front panel
- Multilingual controls
- USB programmable
- Choice of liquid or powder detergent in 6-compartment front soap dispenser
- Equipped for automatic soap dosing
- Large 3" drain valve



See maytagcommerciallaundry.com for warranty details.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2026 Maytag. All rights reserved.
MY250499 02/26

MULTI-LOAD WASHERS U.S./CANADA


MWS85PNAVS ■ SOFT MOUNT ■ NON VEND (OPL CONTROL)




FRONT VIEW (Appearance may vary.)

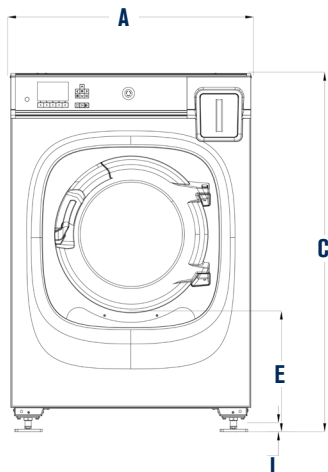

SIDE VIEW

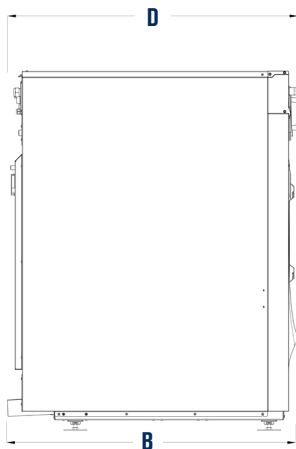

BACK VIEW

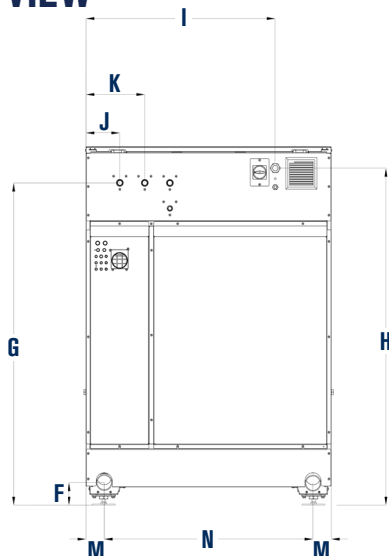

SPECIFICATIONS

MODEL	MWS85PNAVS
Rated Capacity — lb (kg)	85 (38.6)
Extraction (G-Force)	360
Drum Diameter — in (mm)	35.4 (899)
Drum Depth — in (mm)	23 (574)
Drum Volume — cu ft (L)	12.9 (365)
Electrical Requirements — Volts/Hz/Phase	208-240/50-60/3PH
Circuit Breaker	20 A
Motor HP (kW)	7.4 (6.0)
DIMENSIONS	
Crated Width — in (mm)	48.8 (1,240)
Crated Height — in (mm)	71.8 (1,825)
Crated Depth — in (mm)	58.3 (1,481)
Drawing Dimensions	
Uncrated Width — in (mm)	A. 46.2 (1,173)
Drain to Front Panel — in (mm)	B. 55.3 (1,405)
Uncrated Height — in (mm)	C. 66.5 (1,689)
Uncrated Depth — in (mm)	D. 55.3 (1,405)
Door Opening to Floor — in (mm)	E. 25.4 (646)
Center of Drain to Floor — in (mm)	F. 4.2 (107)
Center of Water Connections to Floor — in (mm)	G. 59.8 (1,519)
Electrical Connection to Floor — in (mm)	H. 62.6 (1,589)
Electrical Connection to Left Side — in (mm)	I. 35.7 (906)
Cold Water Connection to Left Side — in (mm)	J. 6.4 (162)
Hot Water Connection to Left Side — in (mm)	K. 11.1 (282)
Leg Height — in (mm)	L. 1.7 (42)
Center of Drain to Side — in (mm)	M. 3.5 (88)
Distance Between Drains — in (mm)	N. 39.4 (1,000)
APPROXIMATE WEIGHT	
Uncrated — lb (kg)	2,255 (1,022.9)
Crated — lb (kg)	2,300 (1,043.3)
SPEED	
Wash RPM (G)	35 (0.62)
Spin RPM (G)	847 (360)
WATER SPECIFICATIONS	
Operating Pressure	15-87 PSI
Inlets Size — in (mm)/Connections	3/4 (19)/2
Approximate Water Consumption TOTAL — Gal (L)/cycle	67.9 (257)
Drain Valve (Outer Diameter) — in (mm)	3 (76.2)

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

