

Vended **Galaxy™ Touch** Stacked Washer-Extractor/Tumble Dryer




Huebsch's new option in Stacked Washer-Extractor/Tumble Dryer, featuring Galaxy™ Touch control, is a unique product that truly delivers return on investment.

- Designed to produce maximum ROI per square foot for laundries where space is at a premium
- Offers all the benefits of a Huebsch 30-pound washer-extractor and tumble dryer (50-pound version also available)
- A flush-mounted soap dispenser contributes to the machine's sleek, modern design, that includes stainless steel with chrome accents
- Minimal front fasteners gives quick access to key washer-extractor components to improve serviceability
- Tumble dryer features two cycle modifiers for additional profit potential
- Great product for owners to differentiate their store from the competition. The stack provides customers an all-in-one option, with no need to use a laundry cart to transfer loads across the store to the tumble dryer section.

Galaxy™ Touch Control

The Galaxy™ Touch display is clear, easy to use, easy to understand directions with profitable cycle modifiers enhance your customers' experience and increase return on investment.

- User-friendly screens with operating instructions built in as part of the control
- Washer-Extractor: 15 total cycle options, 3 basic cycles, 1 custom cycle, 3 basic temperature options
- Tumble Dryer: 5 basic cycles (high, medium, low, delicate, no heat)
- Easy-to-understand cycle modifier prompts will encourage your customers to customize their dry
- Flexible pricing and additional revenue opportunities with customizable cycle modifiers, time-of-day pricing and lucky cycle options
- 30+ Languages available

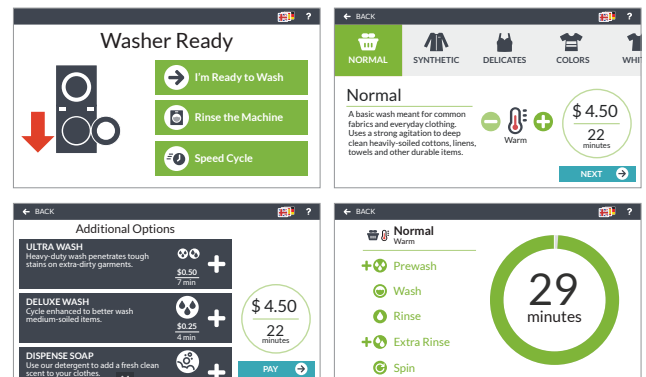

- On-screen timer so your customers know exactly how much time their cycle will take
- Speed Cycle option for those who want to get in and out quickly
- Flexible Payment Options – Coin, Card, Mobile, Cash

Vended **Stacked Washer-Extractor/Tumble Dryer** Specifications

Models		HST30		HST50	
		WASHER-EXTRACTOR	TUMBLE DRYER	WASHER-EXTRACTOR	TUMBLE DRYER
Control Options		Galaxy™ Touch		Galaxy™ Touch	
Capacity – lb (kg)		30 (13) x 2		50 (23) x 2	
Overall Width – in (mm)		31.4 (797)		34.4 (875)	
Overall Depth – in (mm)		45.5 (1152)		51.3 (1302)	
Overall Height – in (mm)		79.7 (2023)		84.3 (2141)	
Cylinder Diameter – in (mm)		24.0 (610)	30.0 (762)	26.3 (668)	33.0 (838)
Cylinder Depth – in (mm)		16.0 (406)	26.0 (660)	20.3 (515)	20.0 (762)
Cylinder Volume – cu ft (liters)		4.2 (119)	10.6 (300)	6.3 (178)	14.8 (419)
Reversing Cylinder		–	Standard	–	Standard
Door Opening Size – in (mm)		14.3 (363)	22.6 (574)	16.3 (414)	26.9 (683)
Door Bottom to Floor – in (mm)		14.0 (356)	51.3 (1303)	14.6 (370)	52.3 (1328)
Water Inlet Connection – in (mm)		2 x 0.75 (19)	–	2 x 0.75 (19)	–
Drain Diameter – in (mm)		1 x 3 (76)	–	1 x 3 (76)	–
Drain Height to Floor – in (mm)		4.3 (108)	–	4.5 (115)	–
Heat Input Power - Btu/hr (kW, Mi/hr.)		–	73,000 (21.4, 77.0)	–	95,000 (27.8, 100)
Gas Connection - in		–	1/2 NPT	–	1/2 NPT
Air Outlet - in (mm)		–	8.0 (200) Elliptical	–	10.0 (250) Elliptical
Airflow - cfm (l/sec)		–	400 (190)	–	600 (285)
Motor - HP (kW)	Fan	–	0.5 (0.4)	–	0.5 (0.4)
	Drive	1 (0.75)	0.3 (0.2)	2 (1.5)	0.5 (0.4)
Total # of Speeds		9	–	9	–
Cylinder Speeds – RPM (G-Force)	Gentle	34 (0.4)	–	33 (0.4)	–
	Wash	48 (0.8)	–	46 (0.8)	–
	Distribution	86 (2.5)	–	82 (2.5)	–
	Very Low	282 (27)	–	269 (27)	–
	Low	485 (80)	–	464 (80)	–
	Medium	542 (100)	–	518 (100)	–
	High	606 (125)	–	579 (125)	–
	Very High	664 (150)	–	635 (150)	–
	Ultra High	766 (200)	–	733 (200)	–
Electrical Specs - Amps	B	100-120V/50/60/1	15	15	–
	X	200-240V/50/60/1/3	15	10	15
	Y	380-415V/50/60/3	15	10	15
Shipping Dimensions Approx. – in (mm)	Width	34.5 (876)		35.5 (902)	
	Depth	47.0 (1194)		54.0 (1372)	
	Height	83.0 (2108)		89.0 (2261)	
Net Weight – lb (kg)		770 (349)		910 (413)	
Shipping Weight – lb (kg)		787 (357)		930 (422)	
Agency Approvals		cULus	CSA	cULus	CSA

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system at Alliance Laundry Systems are registered to ISO 9001.